# High Current Power Inductor
## CPQX3218S Series





Construction Wire


### Outline:
- Excellent DC bias capability to handle instantaneous peak current.
- Flat wire winding, achieving very low DC resistance.
- The inductance value and DC bias characteristic are little affected by temperature.
- Magnetically shielded structure, excellent resistance to electromagnetic interference.


### Features:
- Core material: Composite.
- Environmental: RoHS compliant, halogen free.
- Weight: 74.56g
- Moisture Sensitivity: Level (MSL) 1 (Unlimited floor life at <30°C / 85% relative humidity)
- Operating temperature range: -55℃～+155℃ (Including coil's temperature rise).
- Storage temperature range: -55℃～+155℃


### Application:
- PV inverter/Industrial control/New energy
- DC /DC converters/Motherboards/Filter
- High current switching regulators

## 1 Product Dimensions (mm)

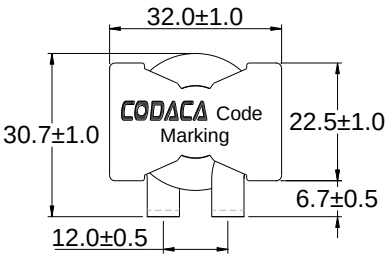






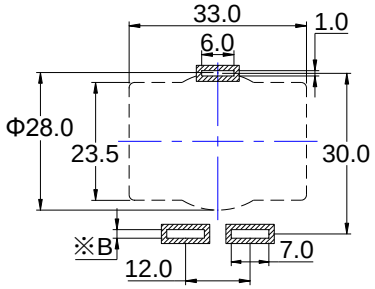Reference Hole Pattern

| Inductance | 3.30μH | 5.00μH | 6.80μH | 9.10μH | 12.0μH | 14.0μH | 18.0μH |
|---|---|---|---|---|---|---|---|
| A(mm) | 1.50 | 1.20 | 1.00 | 0.90 | 0.80 | 0.70 | 0.60 |
| B(mm) | 2.40 | 2.00 | 1.80 | 1.80 | 1.60 | 1.50 | 1.50 |

※ Date code will be changed by manufacture date.




Schematic

## 2 Electrical Characteristics

| Part No. | Inductance (μH)※1 ±20% | D.C.R. (mΩ) Typical | D.C.R. (mΩ) Max. | Isat (A)※2 Typical | Irms (A)※3 Typical |
|---|---|---|---|---|---|
| CPQX3218S-3R3MC | 3.30 | 0.65 | 0.80 | 118 | 67.0 |
| CPQX3218S-5R0MC | 5.00 | 1.00 | 1.20 | 98.0 | 56.0 |
| CPQX3218S-6R8MC | 6.80 | 1.40 | 1.70 | 82.0 | 48.0 |
| CPQX3218S-9R1MC | 9.10 | 1.80 | 2.15 | 72.0 | 43.0 |
| CPQX3218S-120MC | 12.0 | 2.20 | 2.65 | 65.0 | 38.0 |
| CPQX3218S-140MC | 14.0 | 2.80 | 3.35 | 58.0 | 32.0 |
| CPQX3218S-180MC | 18.0 | 3.60 | 4.30 | 52.0 | 28.5 |

**All data is tested on 25℃ ambient temperature**

1. Inductance measure condition at 100kHz,0.1V.
2. Isat: the actual value of DC current when the Inductance decrease 30% of its initial Value.
3. Irms: The actual value of DC current when the Temperature rise is ΔT50℃(Ta=25℃)

## 3 How to Order

CPQX3218S-5R0MC

Model
Dimensions
Value Code
Coating


CODACA ELECTRONIC CO., LTD

TEL: +86 755 89585372 FAX: +86 755 89585280
http://www.codaca.com E-mail: info@codaca.com





This product is not authorized for use in any application related to safety.
Specification subject to change without notice. Please check website for latest information.





Revised: 05/30/2024


## 4 Saturation Current vs Temperature Rise Current Curve

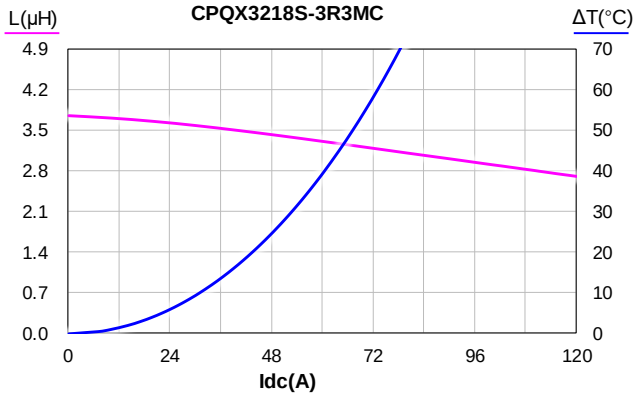


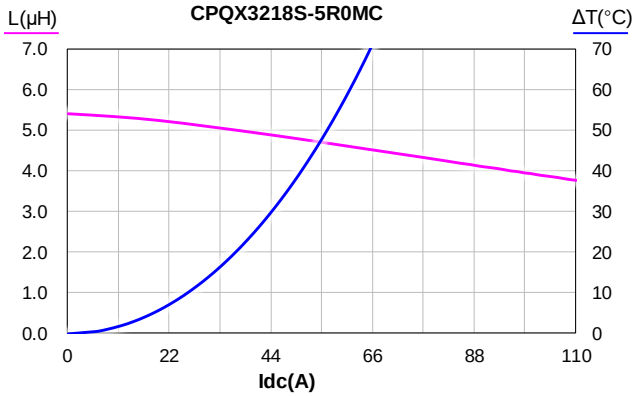


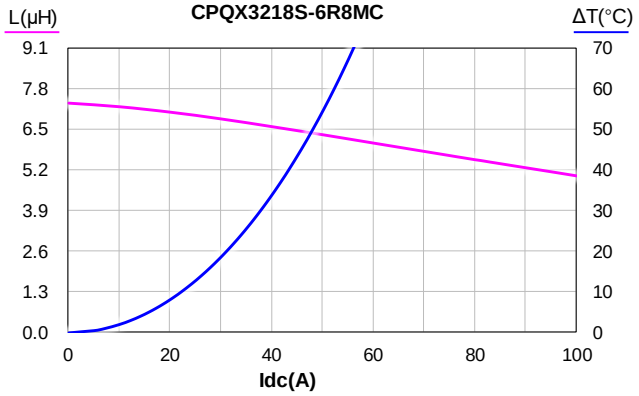
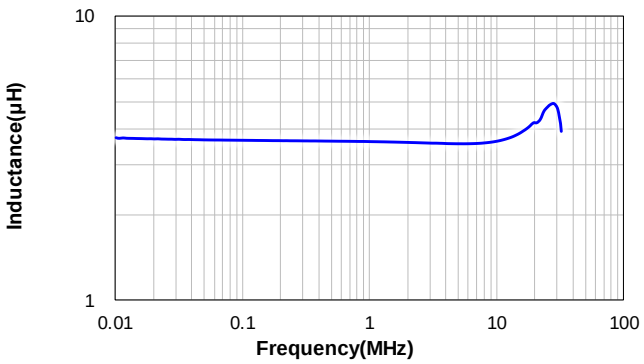


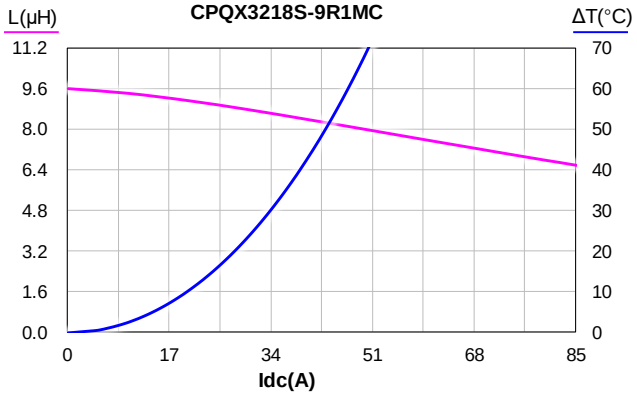
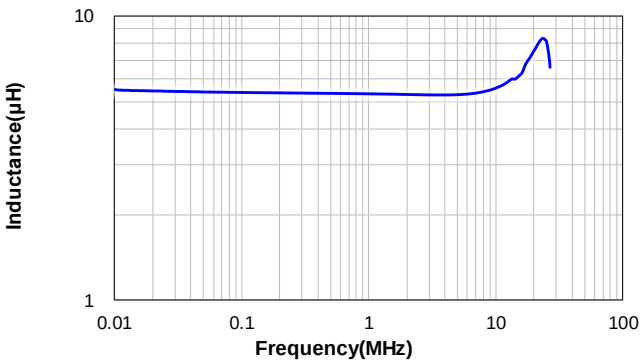


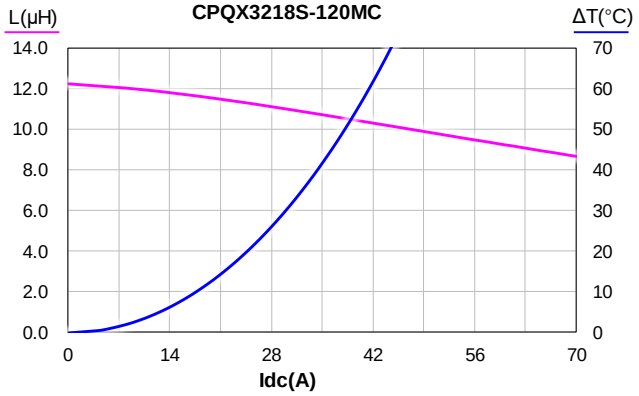
## 5 L vs Frequency

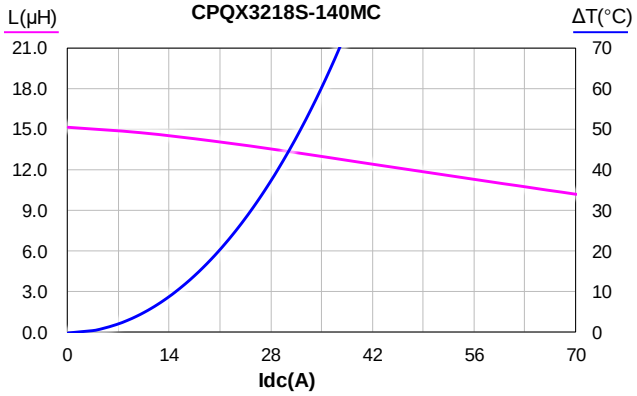
CPQX3218S -3R3MC

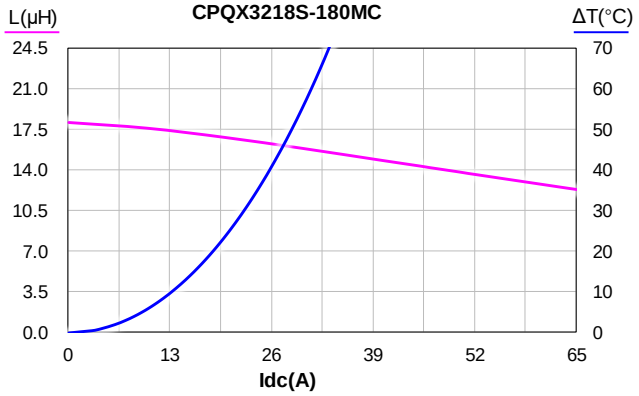



CPQX3218S -5R0MC





CPQX3218S -6R8MC

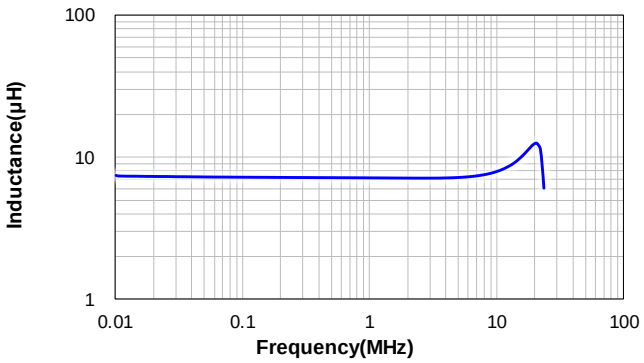



CPQX3218S -9R1MC

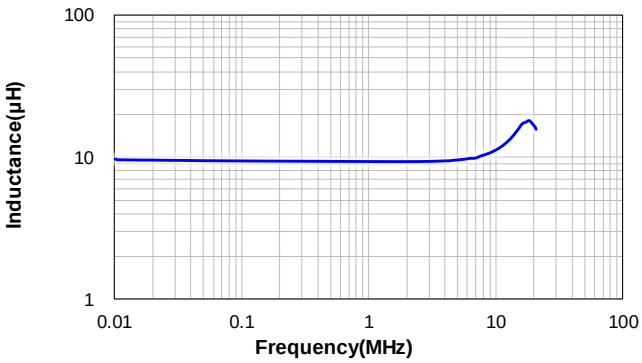



CPQX3218S -120MC

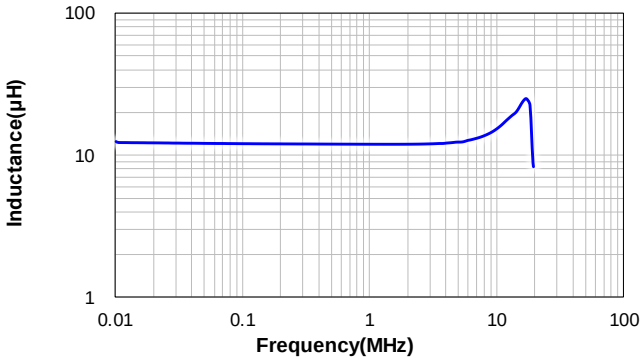


CPQX3218S -140MC

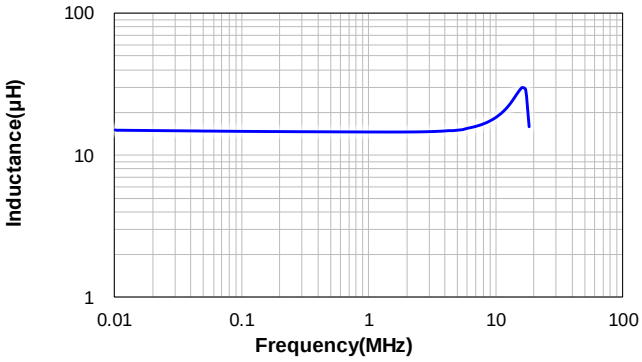



CPQX3218S -180MC

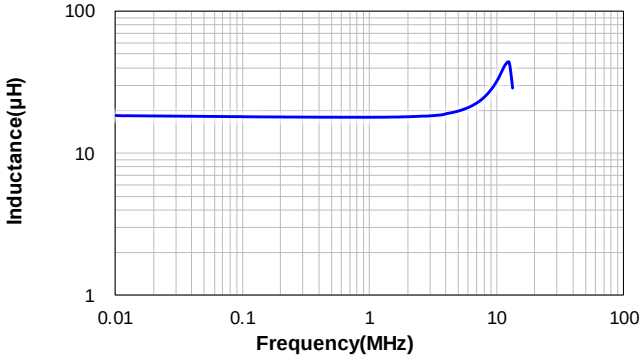


## 6 Impedance vs Frequency


CPQX3218S -3R3MC

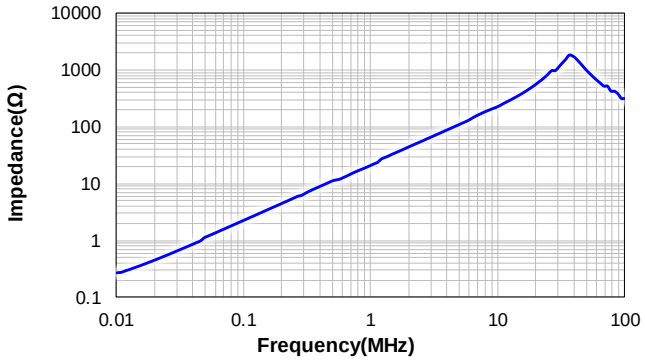



CPQX3218S -5R0MC

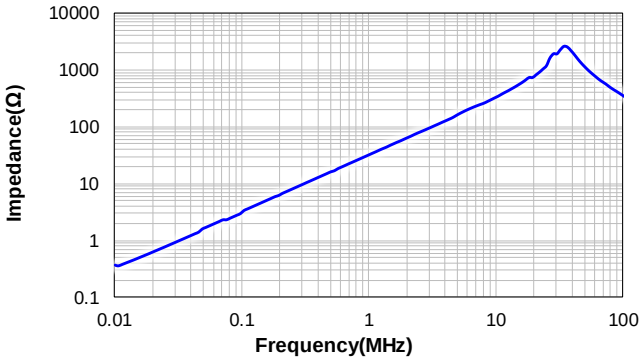



CPQX3218S -6R8MC

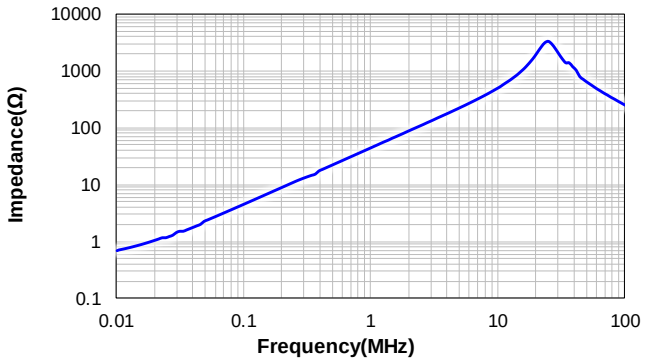



CPQX3218S -9R1MC

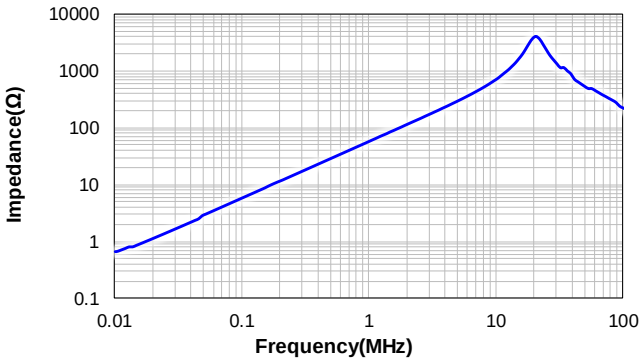



CPQX3218S -120MC

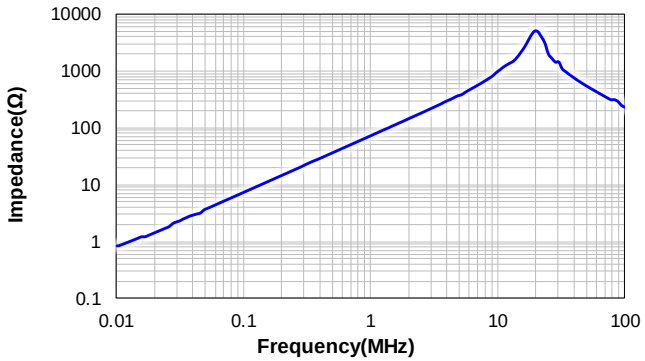


CPQX3218S -140MC

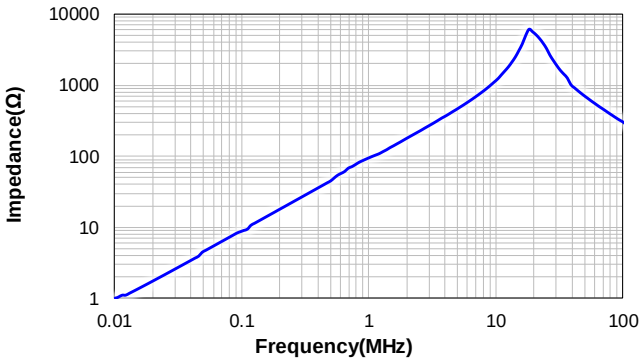




CPQX3218S -180MC

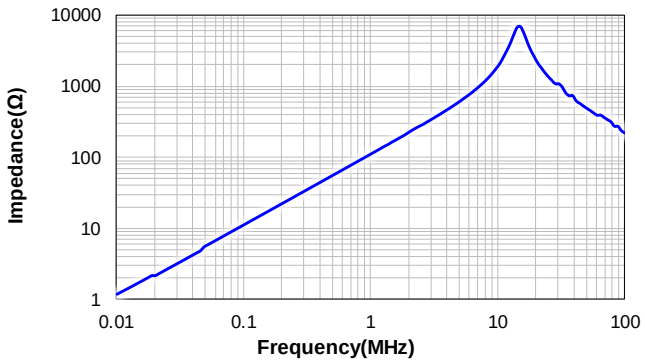

## 7 Packing Specification

### 7.1 Plastic Tray Dimensions (mm)

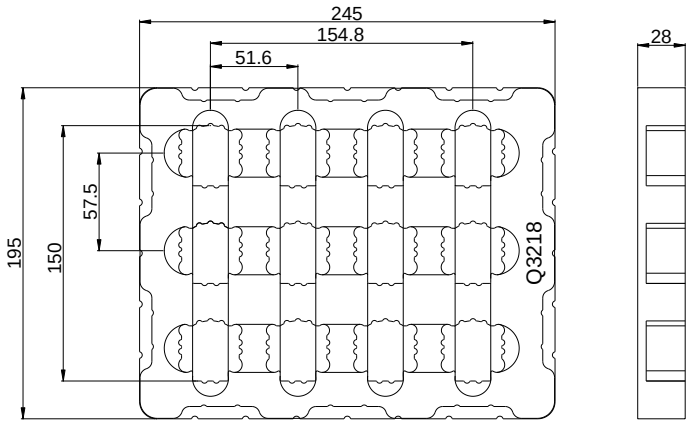


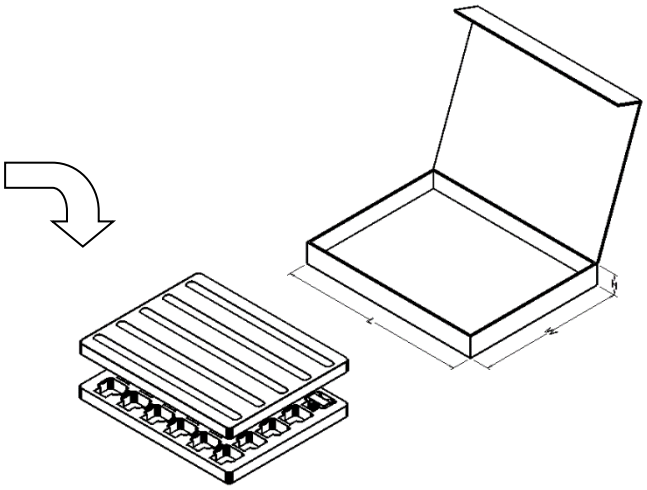



| Packaging Unit (Pcs) | Material |
|---|---|
| 12 | APET |

| L typ | W typ | H typ | No. of Tray (Pcs) | Packaging Unit(Pcs) | Material |
|---|---|---|---|---|---|
| 265 | 205 | 32 | 1 | 12 | Paper |

### 7.2 Packing(mm)

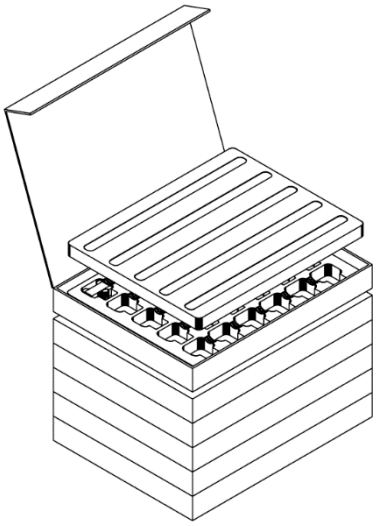

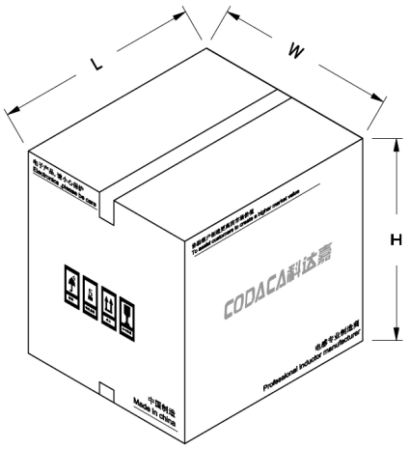


| L typ | W typ | H typ | No. of Inner Carton | Packaging Unit( Pcs) | Material |
|---|---|---|---|---|---|
| 275 | 232 | 261 | 7 | 84 | Paper |

## 8 Notice of Use

8.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

8.2 Product in packing storage condition:temperature 5～40℃, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.

8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.

8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.

8.5 Always handle products with care.

8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.

8.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.

8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devicesor protection circuit in the end product.

8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.

8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.

8.11 Refrain from rinsing coils. If necessary, please consult with us.

*8.12Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.